

SHO800 Series Handheld Digital Oscilloscope



Application Domain


- Outdoor measure
- Circuit measure
- Wind power, PV power and other new energy equipment test
- Automotive electron, electric automobile test
- Electric power system, strong electricity test
- Industry scenes electric debug testing and measuring
- Education and science research
- Quality control

Features & Benefits

- Dual-input, combine oscilloscope, Multimeter and recorder (including TrendPlot and waveform Recorder) in one unit
- Input voltage: input voltage through BNC is up to CAT II 300V and CAT III 150V
Standard probe: 10X CATII 400V
Optional probe: 10X CATII 1000V and 10X CATIII 600V
Oscilloscope and multimeter safety grade is up to CATII 600V and CATIII 300V
- 5.7 inch TFT color LCD display
- Max. 200MHz Bandwidth, 1GSa/s real-time sampling rate single channel, up to 50GSa/s equivalent sampling rate
- With 6000 dots display resolution Multimeter and provides measurements of DCV, ACV, DCI, ACI, Resistance, Diode, Capacitance and Continuity
- Support Scope TrendPlot, Meter TrendPlot and Scope Recorder
- Trigger modes :Automatic , Normal and Single
- Trigger types: Edge, Pulse, Video, Slope and Alternative
- 32 automatic measurements, 3 cursor measure modes
- 4 digital filter mode: Low pass, High pass, Band pass, Band limit
- Math functions: +, -, x, ÷ FFT operations
- Multiple Language User Interface
- Standard configuration interface: USB Device, USB Host
- Support USB storage and update; support PC remote control and PictBridge print
- Rechargeable Li battery pack, compact, portable, fit for outdoor operation.

TrendPlot

- Scope TrendPlot records scope measurement data, 800K points capacity, more than 18 hours recording time
- Meter TrendPlot records multimeter measurement data, 1.2M points recording length, recording time as long as 6000 hours at 0.05Sa/s
- Real-time saving measuring data, which can be outputted to U memory, used for second research and analyzing
- Two display modes, 'ALL' and 'NORMAL'; support zoom and cursor
- Support recording real time

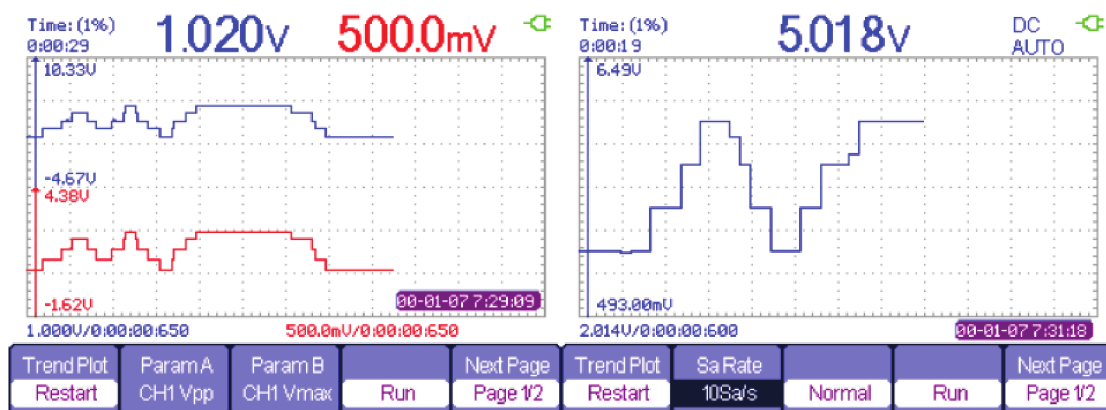

Scope TrendPlot



Meter TrendPlot

Scope Recorder

- Recording scope waveform continually in scan mode
- Support recording, replay and zoom function
- 7M points memory depth, 18 hours recording time
- Maximum 4GB in USB storage mode, 3000hours recording time

Multimeter

- 6000 counts high precision Multimeter
- Providing measurements of DCV, ACV, DCI, ACI, Resistance, Diode, Capacitance, Continuity

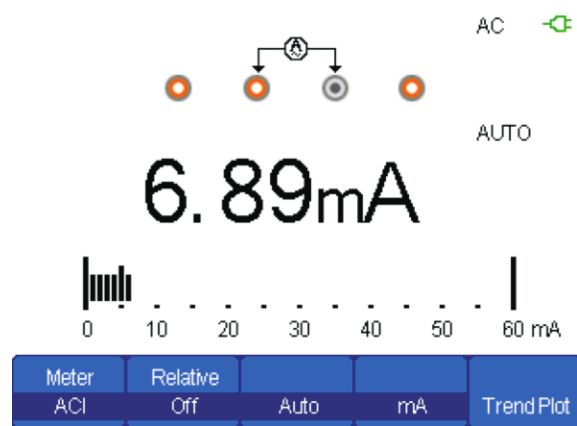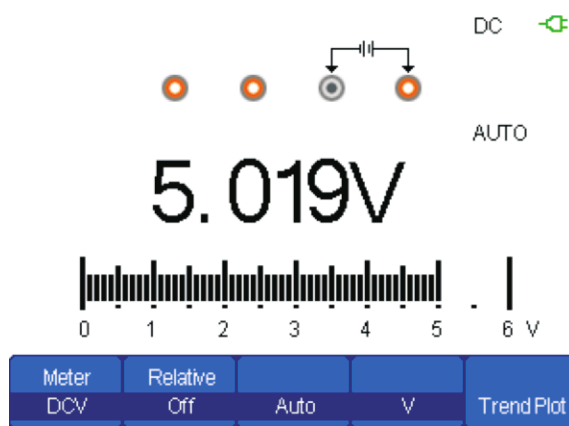

Specifications

Scope				
Type	SHO806	SHO810	SHO815	SHO820
Bandwidth	60MHz	100MHz	150MHz	200MHz
Rise Time	≤5.8ns	≤3.5ns	≤2.3ns	≤1.7ns
Input Impedance	1MΩ± 2%, 18pf± 3pf			
Real Time Sampling Rate	Single Channel :1Gsa/s, Double Channels : 500MSa/s			500Msa/s,
Equivalent Sampling Rate	50Gsa/s,			
Time Base Range	5 ns/ div-50s/div	2.5ns/div -50s/div		
Scan Range	100ms/div-50s/div			
Vertical Sensitivity	2mV/div - 100V/div (1-2-5 step)			
Vertical Resolution	8 bits			
Trigger Types	Edge, Pulse, Video, Slope, Alternative			
Frequency Counter	6 bits			
Connection	USB Device, USB Host			
Math	+,-,*,/,FFT			
Oscilloscope Trend Plot	800K points			

Meter			
Maximum Resolution	6000 Counts		
Function	Range	Resolution	Accuracy
Dc Voltage	60.00 mV	10uV	(±1%±15 digit)
	600.00 mV	100uV	(±1%±5 digit)
	6.000V	1mV	
	60.00V	10mV	
	600.0V	100mV	
	1000V	1V	
AC Voltage (20Hz-400Hz)	60.00 mV	10uV	(±1%±15 digit)
	600.00 mV	100uV	(±1%±5 digit)
	6.000V	1mV	
	60.00V	10mV	
	600.0V	100mV	
	750V	1V	
DC Current	60.00mA	10uA	(±1.5%±5 digit)
	600.0mA	100uA	(±2%±5 digit)
	6.000A	1mA	
	10.00 A	10mA	
AC Current (20 Hz-400Hz)	60.00mA	10uA	(±1.5%±5 digit)
	600.0mA	100uA	(±2%±5 digit)
	6.000A	1mA	(±3%±5 digit)
	10.00 A	10mA	
Resistance	600.0Ω	0.1Ω	(±1%±5 digit)
	6.000kΩ	1Ω	
	60.00kΩ	10Ω	
	600.0kΩ	100Ω	
	6.000MΩ	1kΩ	
	60.00MΩ	10kΩ	(±3%±5 digit)
Capacitance	40.00nF	0.01nF	(±3%±10 digit)
	400.00nF	0.1nF	(±4%±5digit)
	4.000uF	1nF	
	40.00uF	10nF	
	400.0uF	100nF	
Diode	0-2V		
Continuity	<50Ω Buzzer sounds		

Technical Specifications

Oscilloscope

Acquisition System	
Sampling Types	Real time, Equivalent
Sampling Mode	Sampling, Peak detection, Average
Average Times	4, 16, 32, 64, 128, 256

Input Coupling	AC, DC, GND	
Input Impedance	1MΩ±2%, 18pf ±3pf	
Probe Attenuation Factor	1x, 10x	
Probe Attenuation Factors Set	1x, 5x, 10x, 50x, 100x, 500x, 1000x	
Max. Voltage from BNC (Reference BNC Cover)	CAT II	300Vrms
	CAT III	150Vrms
Standard Probe 10X	CAT II	400Vrms
Optional Probe 10X	CAT II	1000Vrms
Max. Floating Voltage from Multimeter Reference to Earth Ground	CAT II	600Vrms
	CAT III	300Vrms
Single Channel Common Mode Rejection, Ratio	>100:1 50MHz	
Channel to Channel isolation	>35dB	

Horizontal System					
Real time Sample Rate		Single Channel : 50Sa/s-1GSa/s Dual Channel 50Sa/s-500MSa/s			
Interaction Mode		x, Sinx			
Memory Depth	SHO806 SHO810 SHO815	Channel Mode	Sample Rate	Normal	Deep
		Single Channel	1Gsa/s	40kpts	Non support
		Single Channel	≤ 500MSa/s	20kpts	2Mpts
		Double Channels	≤ 500MSa/s	20kpts	1Mpts
	SHS820	Single Channel:32Kpts; Double Channel:16Kpts			
Display Mode		MAIN, WINDOW, ZOOM, SCAN, X-Y			
Time Base Accuracy		± 50 ppm (measured over 1ms interval)			
Horizontal Scan Range		2.5ns/div - 50s/div (SHO820) 2.5ns/div-50s/div (SHO815) 2.5ns/div-50s/div (SHO810) 5.0ns/div-50s/div (SHO806) Scan mode : 100ms/div-50s/div (1-2.5-5 step)			

Vertical System	
Vertical Sensitivity	2mV/div – 100V/div (1-2-5 order)
Channel Voltage Offset Range	2 mV – 200mV: ± 1.6V 206mV – 10V: ± 40V 10.2V-100V: ± 400V
Vertical Resolution	8 bit
Channels	2
Analog Bandwidth	200 MHz (SHO820) 150MHz (SHO815) 100MHz (SHO810) 60MHz (SHO806)
Lower Frequency (AC-3dB)	≤ 10Hz
DC Gain Accuracy	5mV/div-100V/div: ≤ ± 3% 2mV/div: ≤ ± 4%
DC Measurement Accuracy ≤ 200mv/div	± [3.0 %X(reading + offset) + 1% X offset +0.2 div+2mV]
DC Measurement Accuracy >200mv/div	± [3.0 % X(reading + offset) + 1%X offset +0.2 div+100mV]
Rise Time	≤ 1.7 ns (SHO820) ≤ 2.3 ns (SHO815) ≤ 3.5 ns (SHO810) ≤ 5.8 ns (SHO806)
Vertical Input Coupling	AC, DC, GND
Math Operation	+, -, *, /, FFT
FFT	Window Mode; Hanning, Hamming, Blackman, Rectangular
	Sampling: 1024 points
Bandwidth Limiter	20MHz (-3dB)

Trigger System	
Trigger Types	Edge, Pulse Width, Video, slope, Alternative
Trigger Source	CH1, CH2
Trigger Modes	Auto, Normal, single
Trigger Coupling	AC, DC, LF Reject, HF Reject
Trigger Level Range	CH1, CH2: ± 6 divisions from center of screen
Trigger Displacement	Pre-trigger : (Memory depth/(2* sampling)), Delay Trigger: 268.04 div
Hold off Range	100ns – 1.5s
Edge Trigger	Edge Type: Rising, Failling, Rising and Failing
Pulse Width Trigger	Trigger Modes: (>, <, =) Positive Pulse Width, (>, <, =) Negative Pulse Width
	Pulse Width Range : 20ns – 10s
Video Trigger	Support Signal Formats: PAL/SECAM, NTSC
	Trigger Condition : Odd Field, Even Field, All lines, Line Num
Slope Trigger	(>, <, =) Positive slope, (>, <, =) Negative slope
	Time : 20ns – 10s
Alternative Trigger	CH1 Trigger Type : Edge, Pulse, Video, Slope
	CH2 Trigger Type : Edge, Pulse, Video, Slope

X-Y Mode	
X-Pole Input/Y-Pole Input	Channel 1 (CH1)/ Channel 2 (CH2)
Sample Frequency	25Ksa/s-250MSa/s (1-2.5-5 step)

Measure System	
Auto Measure (32 Types)	Vpp, Vmax, Vmin, Vamp, Vtop, Vbase, Vavg, Mean, Crms, Vrms, ROVshoot, FOV Shoot, RPRESshoot, FPRESshoot, Rise time, Fall time, Freq, Period, +Wid, -Wid. + Dut, - Dut, Bwid, Phase, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF
Cursor Measure	Manual Track and Auto

Control Panel Function	
Auto Set	Auto adjusting the Vertical system, Horizontal system and Trigger Position
Save/Recall	2 group of referenced waveforms, 20 group setups, 10 group of captured waveforms internal storage/recall function and USB flash driver storage function.

Hard Ware Frequency Counter	
Reading Resolution	1Hz
Range	DC Couple, 10Hz to MAX Bandwidth
Signal Types	Applying to all Trigger signals (Except Video Trigger)

Multimeter

Maximum Resolution	6000 counts
Measure Function	DCV, ACV, DCI, ACI, Resistance, Diode, Capacitance, Continuity
Max input Voltage	AC(Vrms):750V(AC frequency: 20Hz-400Hz)DC : 1000V
Max input Current	AC(Vrms):10A(AC frequency: 20Hz-400Hz) DC : 10A
Impedance	10MΩ

Recorder

Scope TrendPlot	
Display	All, Normal
Record Size	800K points, more than 18 hours
Record Channel	2 channels
Cursor, Zoom	Support
Manual Mode	Support

Meter TrendPlot	
Display	All, Normal
Record Size	1.2M points
Record Channel	1 channel
Cursor, Zoom	Support
Manual Mode	Support

Scope Record	
Function	Record scope waveforms, Replay recorded waveforms
Acquisition Mode	Scan Mode
Time	Record mode : recording time Replay mode : replay time
Sets	Viewer : full screen, split screen Record mode : continuous, single Replay mode : point, frame Save mode : Internal memory
Default	Viewer : Split screen Record mode : continuous Replay mode : Point Save mode : Internal memory
Record Size	Total : 7 M points Single channel : 7M points single channel Double Channels : 3.5M points per channel
Record Manual	Start, Pause, Stop, Continue
Replay Manual	Start, Pause, Stop, Continue, Previous Next,

Generic Specification

Display System	
Display Mode	5.7 inch TFT Color LCD
Resolution	320 horizontal by 234 vertical pixels
Display Color	24 bit
Display Contrast (Typical state)	150:1
Backlight Intensity (Typical state)	300nit
Waveform Display Range	8 x 12 div
Waveform Display Range	Point, Vector
Persist	Off, 1 sec, 2 sec, 5 sec, Infinite
Menu Display	2 Sec, 5 sec, 10 sec, 20 sec, Infinite
Screen Saver	Off, 1 min, 2 min, 5min, 10 min, 15 min, 30 min, 1 hour, 2 hour, 5 hour
Skin	Classical, Modern, Tradition, Succinct
Waveform Interpolation	Sin(x), x
Color model	Normal, Invert


Power		
Line Power Adapter	Input Voltage	100V-240V 50/60Hz
	Output Voltage	9V 4A
Battery	7.4 VDC, 5000mAh, persisting about 5 hours	
Charge time	About 4 hours	

Environments		
Temperature	Operating	0-40°C
	Storage	- 20°C - 70°C
Cooling	Natural Cool	
Humidity	85% RH, 40°C	
Height	3000m	
Electromagnetic Compatibility	2004/108/EC Directive	
	Applicable standards EN 61326- 1.2006	
	EN 61000-3.2: 2006 + A2:2009/EN 61000-3-3:2008	
Safety	2006/95/EC Low Voltage Directive	
	EN61010-1:2010/EN 61010-031:2002+A1:2008	

Mechanical		
Size	Lengh	259.5mm
	Width	163.2mm
	height	53.3mm
Weight	1.5 Kg.	

Type Selections :

Product Type	Bandwidth	Real Time Sampling Rate
SHO820	200MHz	500MSa/s
SHO815	150MHz	1GSa/s
SHO810	100MHz	1GSa/s
SHO806	60MHz	1GSa/s

Standard Accessories
A 9V, 4A, Power adapter
Two 1X/10X oscilloscope probes
Two test leads for multimeter
Probe calibration accessory
A USB data transmitting cable
User Manual
Warranty Card
A CD of Easyscope used for PC Control
Optional probe
 <p>100MHz high-voltage safety probe (CAT II) 1000V, CAT III 600V 200MHz high-voltage safety probe (CAT II) 1000V, CAT III 600V</p>

Subject to change

scientific

Scientific Mes-Technik Pvt. Ltd.

B-14, Pologround, Industrial Estate, Indore 452 015, India

☎ 0731-2422330 /31 /32 /33 📠 0731-2422334, 2561641 ✉ info@scientificindia.com 🏠 www.scientificindia.com



Bengaluru 080-23452635
Chennai 044-42054180
Hyderabad 040-27534995, 27534996
Kerala +919497721864

✉ bangalore@scientificindia.com
✉ chennai@scientificindia.com
✉ hyderabad@scientificindia.com
✉ kerala@scientificindia.com

Kolkata 033-22282223-6
Mumbai +919820307693
New Delhi +919977994909
Pune 020-25282882

✉ kolkata@scientificindia.com
✉ mumbai@scientificindia.com
✉ ndelhi@scientificindia.com
✉ pune@scientificindia.com